

HONEYWELL GRANIT™ XP ACCESSORIES GUIDE



Honeywell

TABLE OF CONTENTS

- 3 Stands, Holders, Holsters, Misc
- 4 Access Points, Batteries, Charge and Communication Bases, and Chargers
- 5 Heaters
- 6 Cables
- 7 Power Supplies for Charge/Comm Bases
- 7 Power Supplies for Cabled Connections

STANDS, HOLDERS, HOLSTERS, MISC



HOLDER-010-U

Wall-Mount Cup

Holder Kit: Plastic bracket facilitates mounting of scanner to wall; two mounting screws included in kit.



HOLSTER-INDUSTRIAL

Granit Holster

Securely holds Granit and Granit XP scanners, leaving hands free to accomplish tasks.



STND-30R00-011-4

Rigid Presentation Stand

Stand: gray, 5" rigid rod, weighted base, Granit cradle.



STND-33F00-012-4

Flexible Presentation Stand

Stand: gray, 9" flexible rod, weighted base, Granit cradle.



TOOLBAL

Take-Up Reel/Tool Balancer

Suspension reel commonly used for scanner mounting/retention on vehicles and in fixed locations.



VMHOLDER2K

Vehicle mount holder

Vehicle Mount Cup: Contains vehicle mount Granit scanner cup with 1 in. dia. ball joint attachment. Recommended use with VMHOLDER3K or VMHOLDER4K), not included.



VMHOLDER3K

Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and circular mounting plate. Recommended use with VMHOLDER 2K cup (not included).



VMHOLDER4K

Vehicle mount holder

Vehicle mount kit: Contains adjustable arm with 1 in. dia. ball joints and square post clamp base for posts up to 3 in. wide and 2.5 in thick. Recommended use with VMHOLDER 2K cup (not included).



19911ENDCAP

Battery end cap

Cordless Granit XP end cap (battery door) for 1991i models.



199XILNYRDPLT

Lanyard plate

Replacement metal lanyard plate for connection to tool balancer. Compatible with Granit XP 199Xi models. Pack of 1.



199XIORING

Corded IP65/67 O-Ring

O-ring seal for IP65/67 sealing with Granit XP scanner cables. Pack of 10.

ACCESS POINTS, BATTERIES, CHARGE AND COMMUNICATION BASES, AND CHARGERS



AP-100BT-07N

Bluetooth Access Point

Access point for Granit XP scanners. Class 1 Bluetooth, 100m, up to 3 Granit XP scanners can be connected (cables sold separately).



AP-05-100BT-07N

Bluetooth Access Point

Access point for Granit XP and Granit 198ii scanners. Class 1 Bluetooth, 100m, up to 3 Granit XP scanners can be connected (cables sold separately).



BAT-SCN05

Smart Battery Pack

Battery: Lithium-ion battery for Granit XP and Xenon XP cordless scanners.



CCB22-100BT-03N

Granit XP Charge/Communication Base

Base: Charge and communication. Class 1 Bluetooth, 100m (300'), up to 3 scanners can be connected. Compatible with RS232/USB/KBW cables (sold separately).



COB22

Granit XP Charge Only Base

Base: Charge only. Only one scanner can be connected at a time. Power supply required and must be purchased separately.



MB4-BAT-SCN01XXD06¹

4-Bay Battery Charger – Desk Mount

4-bay battery charger for use with Granit and Xenon Lithium-ion batteries, desktop power supply, two mounting screws (100006897), and instructions (MBC-INST).



MB4-BAT-SCN01XXW06¹

4-Bay Battery Charger – Wall Mount

4-bay battery charger for use with Granit and Xenon lithium-ion batteries, wall-mount power supply, two mounting screws (100006897), and instructions (MBC-INST).

1. Indicates characters designating regional configuration

HEATERS



520L-24-S3

Scanner Heater with Cable Retractor

24V heater for Granit scanners in freezer environments.



520L-3648-S3

Scanner Heater with Cable Retractor

36-48V heater for Granit scanners in freezer environments.



CABLES

CBL-020-300-C00

RS-232 Power Cable

Cable: RS232 (5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-020-300-C00-01

RS-232 Power Cable

Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-020-300-C00-02

RS-232 Power Cable

Cable, Industrial (for freezer temps): RS-232 (5V signals), black, DB9 Female, 3 m (9.8 ft), coiled, 5V external power with option for host power on pin 9, with ferrite.

CBL-020-500-C00

RS-232 Power Cable

Cable: RS232 (+5V signals); black, DB9 female, 5m (16 ft), coiled, external power with option for host power on pin 9, w/o ferrite.

CBL-020-350-S00

RS-232 Power Cable

Cable: RS-232 (5V signals), black, DB9 female, 3m (9.8'), straight, external power with option for host power on pin 9, w/o ferrite.

CBL-120-300-C00

RS-232 Power Cable

Cable: RS-232 (+/-12V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite.

CBL-220-300-C00

RS-232 Power Cable

Cable: RS-232 (5V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, Wincor Beetle.

CBL-320-300-C00

RS-232 Power Cable

Cable: RS-232 (+/- 12V signals), black, DB9 Male, 3m (9.8'), coiled, external power with option for host power on pin 9, w/o ferrite.

CBL-500-300-C00

USB Power Cable

Cable: USB, black, Type A, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-500-300-C00-07

USB Power Cable

Cable: Industrial (for freezer environments)USB, black, Type A, 3m (9.8'), straight, 5V host power.

CBL-500-300-S00

USB Power Cable

Cable: USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-500-300-S00-01

USB Power Cable

Cable, Industrial (for freezer environments) USB, black, Type A, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-500-500-C00

USB Power Cable

Cable: USB, black, Type A, 5m (16.4'), coiled, 5V host power, w/o ferrite.

CBL-501-300-S00

USB Power Cable

Cable: USB Granit scanner cable, compatible with USB D9 connectors on VM series docks, w/o ferrite.

CBL-503-300-C00

USB Power Cable

Cable: USB, black, 12V locking, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-503-300-S00

USB Power Cable

Cable: USB, black, 12V locking, 3m (9.8'), straight, 5V host power, w/o ferrite.

CBL-503-500-C00

USB Power Cable

Cable, USB, black, 12V locking, 5m (16.4'), coiled, 5V host power, w/o ferrite.

CBL-720-300-C00

KBW Power Cable

Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite.

CBL-720-370-C00

PS-2 Power Cable

Cable: USB, black, PS-2 Keyboard Wedge, 3.7 meter (11.3 ft) Coiled, 5V, w/o ferrite.

CBL-800-300-C00

USB C Power Cable

Cable: USB C, 3m (9.8'), coiled, 5V host power, w/o ferrite.

CBL-801-370-C00

RS-232 Talkman Power Cable

Cable, RS-232 (5V signals), black, Granit to Vocollect Talkman, 3.7m (12 ft), coiled, host 5V power only, w/o ferrite.

POWER SUPPLIES FOR CHARGE/COMM BASES

PS-05-1000W-A-6


NA CCB Power Supply

Power supply: Type A plug (NA), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

PS-05-1000W-C

EU CCB Power Supply

Power supply: Type C plug (EU), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

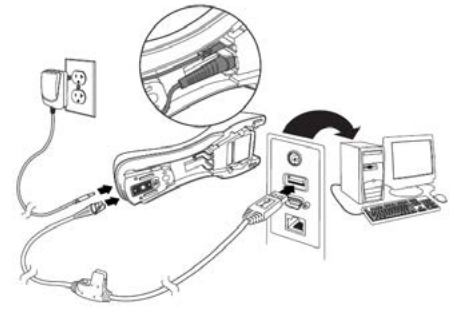

PS-05-1000W-G

UK CCB Power Supply

Power supply: Type G plug (UK), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

PS-05-1000W-I

ANZ Power Supply

Power supply: Type I plug (ANZ, Argentina, China), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with Granit and Granit XP bases.

POWER SUPPLIES FOR CABLED CONNECTIONS

46-00525-6


Power Supply – NA Plug

Power Supply: Type A plug (NA), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

46-00526-6

Power Supply – EU Plug

Power Supply: Type C plug (EU), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

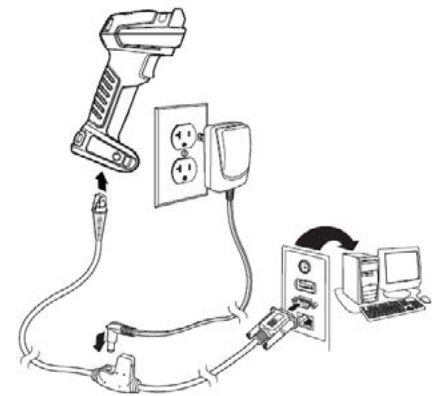

46-00528

Power Supply – ANZ Plug

Power Supply: Type I plug (ANZ, Argentina, China), 1.0A @ 5.2VDC, 90-255VAC @ 50-60Hz, LV6, for use with cabled connections and Xenon and Voyager bases.

For more information

www.sps.honeywell.com

Honeywell Safety and Productivity Solutions

300 S Tryon St Suite 500

Charlotte, NC 28202

800-582-4263

www.honeywell.com